


Since 1985

انسوراب
Insuwrap

Product Information Insurbond 106-S Contact Adhesive

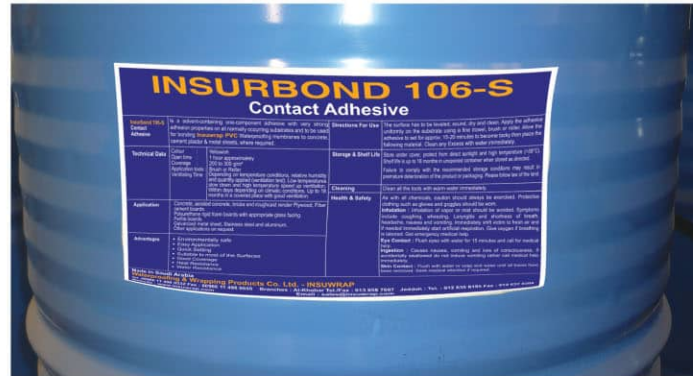

Insurbond 106-S Contact Adhesive	Is a solvent-containing one component adhesive with very strong adhesion properties on all normally occurring substrates and to be used for bonding Insuwrap PVC waterproofing membranes to concrete, cement plaster & metal sheets; where required.	
Technical Data	Colour : Yellowish Open Time : 1 hour approximately Coverage : 200 - 300 g/m ² Application : Brush or roller Ventilating Time : Depending on temperature conditions, relative humidity and quantity applied (ventilation test). Low temperatures slow down and high temperature speed up ventilation. Within days depending on climatic conditions. Up to 18 months in a covered place with good ventilation.	
Application	Concrete, Aerated concrete, Bricks and Roughcast render plywood, Fiber cement boards Polyurethane rigid foam boards with appropriate glass facing Perlite boards Galvanized metal sheet, Stainless steel and Aluminum Other applications on request	
Advantages	<ul style="list-style-type: none"> ● Environmentally safe ● Easy Application ● Quick Setting ● Suitable to most of the surfaces ● Good Coverage ● Heat Resistance ● Water Resistance 	



Since 1985

انسورب
Insurap

Product Information Insurbond 106-S Contact Adhesive

Directions For Use	The surface has to be leveled, sound, dry and clean. Apply the adhesive uniformly on the substrate using a fine trowel, brush or roller. Allow the adhesive to set for approx. 15-20 minutes to become tacky then place the following material. Clean any excess with water immediately.
Storage & Shelf Life	Store under cover, protect from direct sunlight and high temperature (upto 38°C). Shelf life is upto 18 months in unopened container when stored as directed. Failure to comply with the recommended storage conditions may result in premature deterioration of the product or packaging. Please follow law of the land.
Cleaning	Clean all the tools with warm water immediate.
Health & safety	As with all chemicals, caution should always be exercised. Protective clothing such as gloves and goggles should be worn. Inhalation : Inhalation of vapor or mist should be avoided. Symptoms include coughing, wheezing, laryngitis and shortness of breath, headache, nausea and vomiting. Immediately shift victim to fresh air and if needed immediately start artificial respiration. Give oxygen if breathing is labored. Get emergency medical help. Eye Contact : Flush eyes with water for 15 minutes and call for medical help. Ingestion : Causes nausea, vomiting and loss of consciousness. If accidentally swallowed do not induce vomiting rather call for medical help immediately. Skin Contact : Flush with water or soap and water until all traces have been removed. Seek medical attention if required.

A Member of **rar** & Sons Group
**Waterproofing and Wrapping
Products Co. Ltd.**

100-100-1000
100-100-1000-1000

100-100-1000-1000-1000
100-100-1000-1000-1000
100-100-1000-1000-1000
100-100-1000-1000-1000